

IMPREG-M Impregnation Tanks

<http://www.whitelegg.com/products/electric-motor/electric-motor-rewind-and-repair/impreg-m-impregnation-tanks>

For impregnation of electric motor coils with resin, motorised version with storage tank and immersion tank.

Suitable for use with a wide range of varnish including trickle and water based types. The varnish is pumped back into the storage tank after the part has been immersed. Fumes are kept away from the operator. The sealed storage tank prevents solvent loss and maintains varnish in the best condition. Once the storage tank is filled. The lid of the immersion tank is lifted and the job lowered in. The pump is then switched on and the varnish is pumped into the tank. Very simple operation providing the best results.

IMPREG-M-A 1.0m internal size, 1000 litre capacity

IMPREG-M-B 1.2m internal size, 1728 litre capacity

IMPREG-M-C 1.5m internal size, 3375 litre capacity

IMPREG-M-D 2.0m internal size, 6000 litre capacity


Pump flow rate:

10 gallons (45 litres) per minute

Power requirements:

Pump motor: 415V, 3 ph. + neutral; 10 amps /phase. Fan Motor 240V, 1 phase; 5 amps.



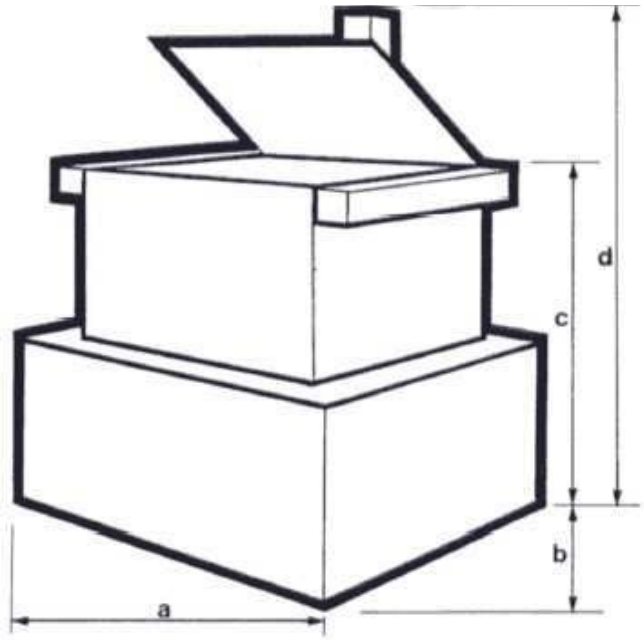

	Impreg-M-A	Impreg-M-B	Impreg-M-C
a width mm	1700	1750	2015
b depth mm	1610	1840	2000
c height mm	1745	2075	2330
d overall height mm	2120	2685	3015
Weight kg	640	1100	2150
Immersion tank capacity - litres	1000	1728	3375
Useable internal dip tank dimensions cm	100 x 100 x 108	118 x 118 x 125	136 x 136 x 137