

### Applications

- » For extraction tables, extraction hoods and extraction arms
- » High levels of smoke and dust
- » Non-stop operation

### Benefits


- » Low investment costs because extraction takes place without air filtration

### Properties

- » Galvanised steel sheet construction
- » Different performance classes

## Central Fan

- » For large air volumes
- » Different capacities

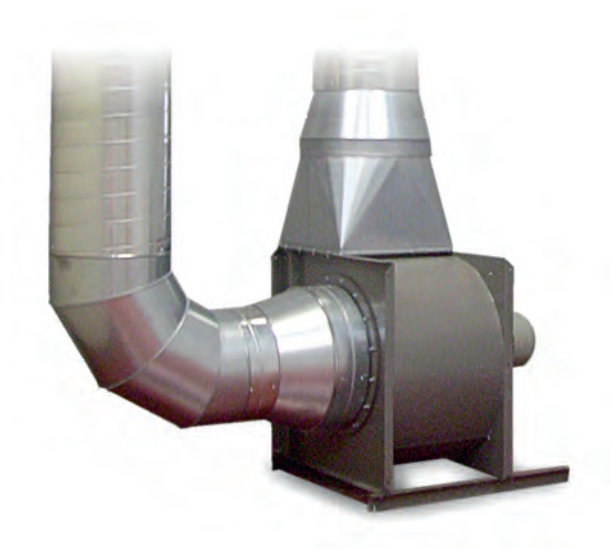

### Technical Data

| Basic data   |                   |
|--------------|-------------------|
| Power supply | 3 x 400 V / 50 Hz |

### Order Data

| Art. No.            | Description                           |
|---------------------|---------------------------------------|
| <b>921 0360 130</b> | Extraction capacity 2,000-4,000m³/h   |
| <b>921 0480 140</b> | Extraction capacity 3,000-5,000m³/h   |
| <b>921 0510 170</b> | Extraction capacity 4,000-7,000m³/h   |
| <b>921 0700 170</b> | Extraction capacity 6,000-9,000m³/h   |
| <b>921 0750 230</b> | Extraction capacity 6,000-10,000m³/h  |
| <b>921 1500 140</b> | Extraction capacity 7,000-15,000m³/h  |
| <b>921 1800 150</b> | Extraction capacity 10,000-22,500m³/h |

\*Suitable accessories available upon request

